



ASHAA

LAMPADA DA TERRA · FLOOR LAMP

design Stefano Bigi 2019

Cattura la scena la lampada Ashaa, un incontro inaspettato tra poesia e scultura, fatto di legno, vetro e luce. Otto esili doghe curvate, finitura rovere caffè, inglobano e sorreggono una sfera in vetro soffiato (in 3 versioni: trasparente, fumé, bronzo) posizionabile a piacere nella parte superiore o inferiore della lampada. I LED inseriti nelle doghe e nel top interagiscono con la brillantezza del cristallo creando effetti luminosi sorprendenti. I LED si accendono con l'interruttore a pedale on/off, con il telecomando o con Casambi, esclusivo smart lighting di controllo dell'illuminazione da smartphone e tablet.

The lamp Ashaa steals the show; it is the unexpected fusion of poetry and sculpture, created with wood, glass and light. Eight slim curved slats, with a coffee-brown oak finish, engulf and support a blown glass ball (available in three versions: transparent, smoked and bronze); they can be positioned as desired in the top or bottom half of the lamp. The LEDs inserted in the slats and in the top interact with the brilliance of the crystal glass to create exciting luminous effects. The lights are controlled by an on/off foot pedal, a remote control or by Casambi, the exclusive smart lighting system that controls the illumination from a smartphone or tablet.

NATEVO

ASHAA

design Stefano Bigi 2019

LAMPADA DA TERRA · FLOOR LAMP

Ø39xH193
Ø39xH193

finitura struttura
structure finish

rovere caffè - anodic bronze
coffee-brown oak - anodic bronze

diffusore
diffuser

vetro trasparente - vetro fumè - vetro bronzo
clear glass - smoked glass - bronzed glass

accensione
light switch type

interruttore a pedale on/off
on/off foot pedal control

telecomando con dimmer
remote control with dimmer

casambi - l'esclusivo smart lighting che controlla l'illuminazione da smartphone o tablet
casambi - the exclusive smart-lighting device that controls the illumination from a smartphone or tablet

potenza allacciata
connected power

77 W

temperatura colore
color temperature

2700 K

flusso luminoso
light flux


8041 lm

tensione
tension


220 V EU / 110 V EU

grado di protezione
protection level

IP 20

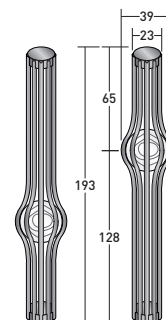

POSIZIONE CAVO · CABLE POSITION

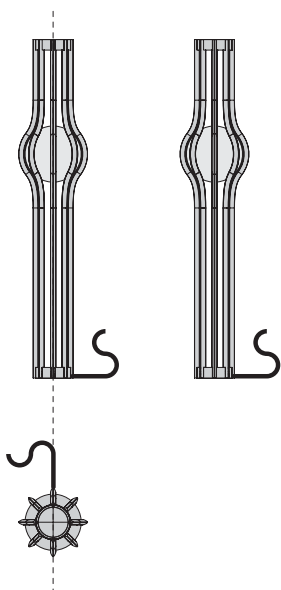

TELECOMANDO · REMOTE



2 M

INTERRUTTORE · SWITCH



4 M